

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Shihua	1/8/14	1/8/14

1 Electrical

- 1.1 Impedance: 50 Ω
1.2 Frequency: DC-40GHz
1.3 VSWR: 1.25:1
- 2 Mechanical&Environmental
- 2.1 Temperature range -55°C ~+165°C
2.2 Durability(matings) >500
2.3 RoHs Compliant Yes


3 Material&Finish

- 3.1 Pin contact: Beryllium-Copper, gold plated
3.2 Body: Stainless Steel, Passivated
3.3 Insulators: PEI

4 Interface Standards

- 4.1 2.92 MIL-STD-348A

2.92 Female

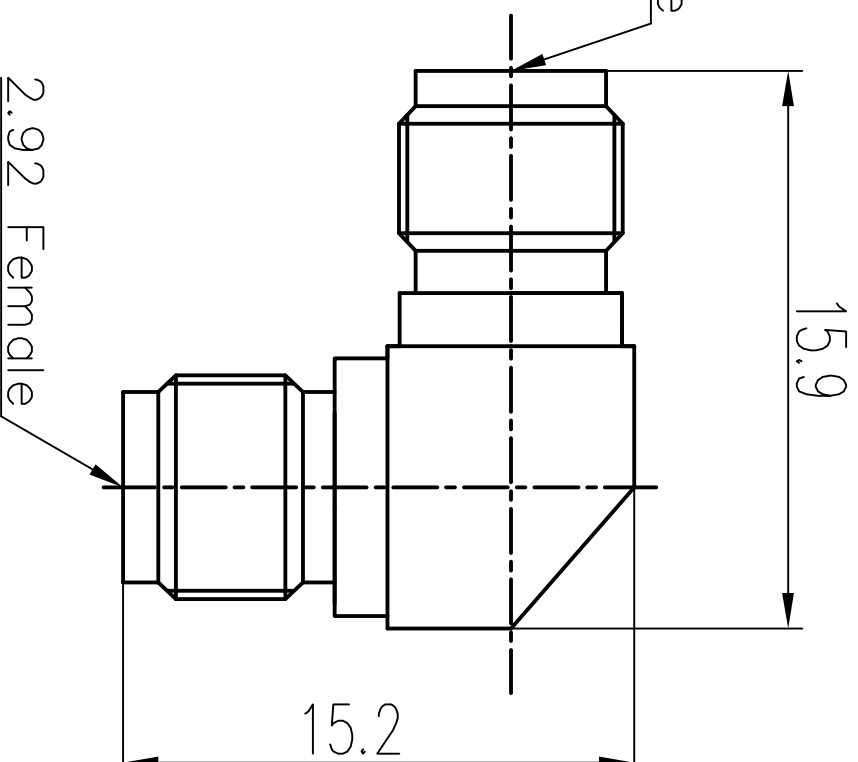

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 1/8/14	TITLE: Precision Adapter	 ® www.teritall.com
ENGINEER: C.Too 1/8/14	2.92 Female to 2.92 Female Right Angle	
APPROVED: W.Qiang 1/8/14		
TOLERANCES UNLESS OTHERWISE SPECIFIED		
X ±0.05		
XX ±0.02		
ANGLES ±1°		
PART NO: 2.92-KWKG	SIZE: A4	SCALE: N/A
	SHEET: 1/1	REV: A