

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical

1.1 Impedence

50 Ω

1.2 Frequency

DC~6GHz

1.3 Dielectric withstanding voltage

1500V(volts RMS)

1.4 Insulation resistance:

$\geq 5000M\Omega$

1.5 VSWR

≤ 1.20
- 2 Environmental&Mechanical

2.1 Temperature range

-45℃~125℃

2.2 RoHs Compliant

2.3 Durability

>500 cycles
- 3 Materials&plating

3.1 Body:


Brass,Suco-plated

3.2 Insulator:

Teflon

3.3 Contact Pin:

Brass, Silver-plated

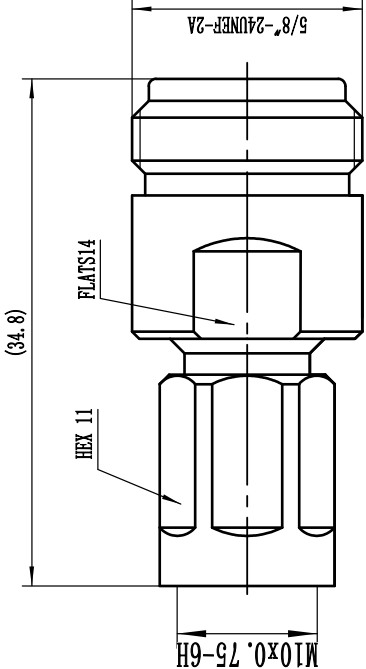

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 01/03/2022		TITLE	
ENGINEER: C. Tao 01/03/2022		RF Coaxial Connector	
APPROVED: W. Qiang 201/03/2022		N Female to NEX10 Male Adaptor	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: N/NEX10-KJ	
X ± 0.50		SIZE: A4	
.X ± 0.20		SCALE: 2:1	
.XX ± 0.10		SHEET: 1/1	
ANGLES $\pm 1^\circ$		REV: VA	
		DIMENSION IN MILLIMETERS (mm)	
		www.rf-connector-china.com	