


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: DC~1GHz
- 1.3 VSWR: ≤1.30
- 1.4 Insulation resistance: ≥5000M Ω
- 1.5 Dielectric strength: 1000V
- 1.6 Center contact ≤ 1.5m Ω
- 1.7 Outer contact ≤ 0.2m Ω

2 Materials&Finish

- 2.1 Inner Contact: Brass, Gold plated
- 2.2 Outer Contact: Brass, Nickel plated
- 2.3 Insulators: PTFE

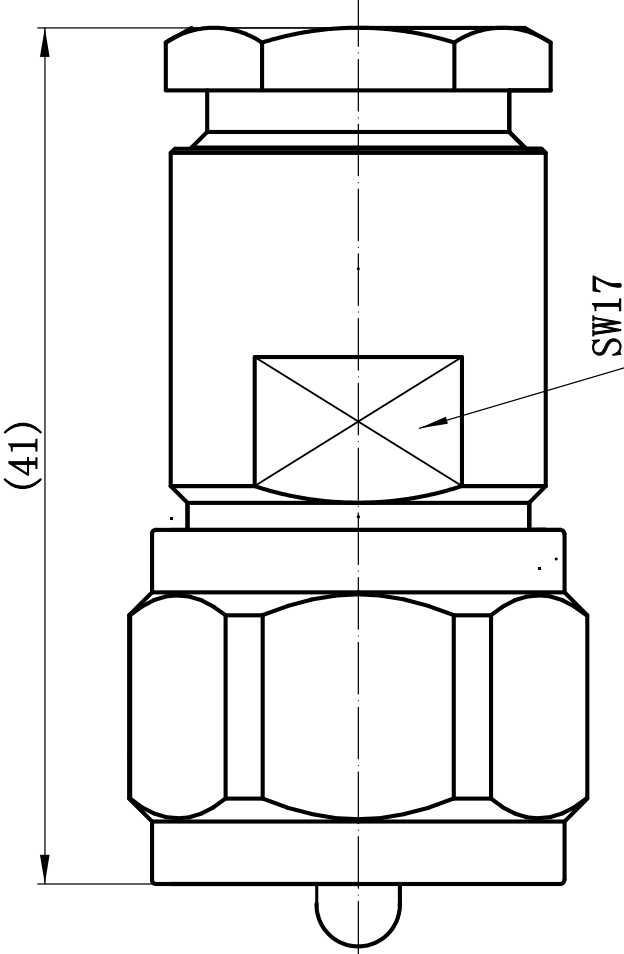

DATE : T. Shihua 13/06/15		TITLE:		RF Coaxial Connector		www.rf-connector-hina.com	
DESIGNED : C. Tao 13/06/15				UHF male Conn. For LMR400/RC213 Cable		DIMENSION IN MILLIMETERS (mm)	
DRAWN : W. Qiang 13/06/15				TOLERANCES UNLESS OTHERWISE SPECIFIED		A4	
				X ±0.50		1/1	
				.X ±0.20		A	
				.XX ±0.10			
				ANGLES ±1°			
				UHF-J400A-1			

- Notes:
- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 - 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY