


1		2		3		4	
This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission							
A		B		A		B	
1 电气性能		2 材料及涂覆		3		4	
1.1 特性阻抗		2.1 外壳: 黄铜, 镀三元		1		2	
1.2 频率		2.2 绝缘子: teflon		3		4	
1.3 介质耐压		2.3 内导体: 黄铜, 镀金		1		2	
1.4 中心导体电阻		2.4 螺套: 黄铜, 镀三元		3		4	
1.5 外导体电阻				1		2	
1.6 绝缘电阻				3		4	
1.7 VSWR				1		2	
				3		4	

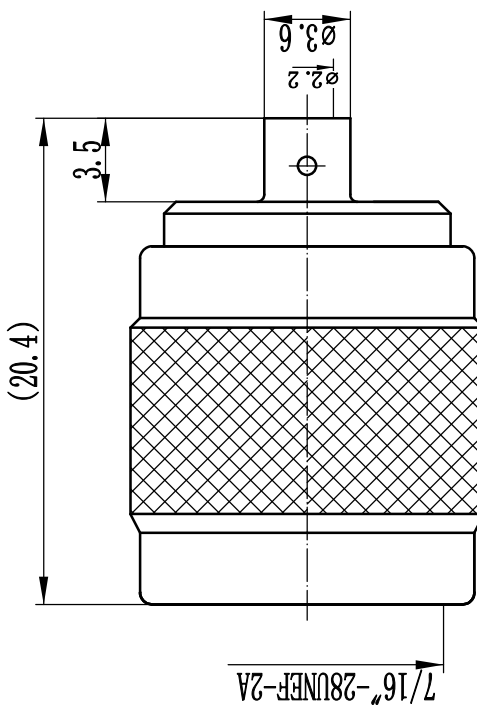

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 21/05/08		TITLE:	
ENGINEER: C. Tao 21/05/08		RF Coaxial Connector	
APPROVED: W. Qiang 21/05/08		TNC Male Conn. for RG405/086 Cable	
TOLERANCES UNLESS OTHERWISE SPECIFIED		www.terulilai.com	
X ±0.50		DIMENSION IN MILLIMETERS (mm)	
.X ±0.20		1/1	
.XX ±0.10		REV: A	
ANGLES ±1°		SHEET: 1/1	
PART NO: TNC-JB2		SCALE: N/A	
SIZE: A4		REV: A	