

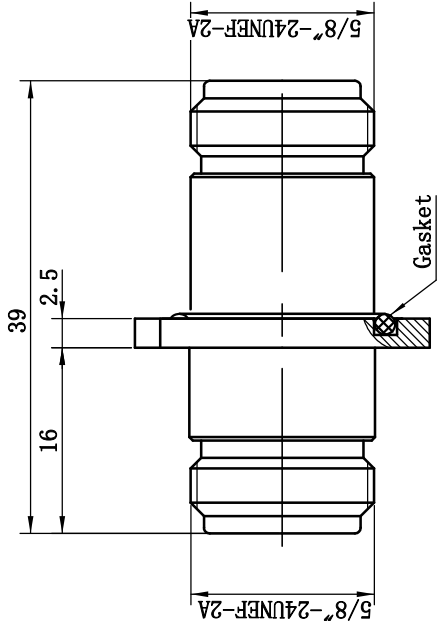


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

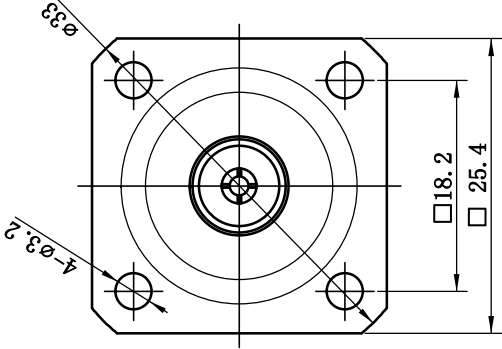

Mounting Hole



- 1 Electrical 电气性能
- 1.1 Impedance特性阻抗: 50 Ω
 - 1.2 Frequency频率范围: DC~11GHz
 - 1.3 VSWR电压驻波比: $\leq 1.25@6\text{GHz}$
 - 1.4 Insertion Loss (dB): $\leq 0.05\text{Sqt. (f_GHz)}$
 - 1.5 Insulation resistance绝缘电阻: $\geq 5000\text{M}\Omega$
 - 1.6 Dielectric withstanding voltage介质耐压: 1500V
 - 1.7 Center contact中心导体接触电阻 $\leq 1.5\text{m}\Omega$
 - 1.8 Outer contact外导体接触电阻 $\leq 0.2\text{m}\Omega$
- 2 Environmental&Mechanical环境&机械性能
- 2.1 Temperature range温度范围: $-55^{\circ}\text{C}\sim+125^{\circ}\text{C}$
 - 2.2 RoHs Compliant 符合RoHs
 - 2.3 Durability寿命: >500 cycles (次)
- 3 Materials&Finish材料&涂镀
- 3.1 Body外壳: Brass, nickel plated 黄铜, 镀镍
 - 3.2 Insulator 绝缘介质: Teflon 聚四氟乙烯
 - 3.3 Contact Pin中心导体: Bronze, Gold plated 锡青铜, 镀金
 - 3.4 Gasket密封圈: Silicone Rubber硅胶

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 17/12/14	TITLE: RF Coaxial Connector			DIMENSION IN MILLIMETERS (mm)	www.rf-connector-china.com
ENGINEER: C. Tao 17/12/14					
APPROVED: W. Qiang 17/12/14					
TOLERANCES UNLESS OTHERWISE SPECIFIED					
X	±0.50				
.X	±0.20				
.XX	±0.10				
ANGLES	±1°	PART NO:	N-KPKM	SIZE:	A4
				SCALE:	N/A
				SHEET:	1/1
				REV:	A