


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical
- 1.1 Impedance: 50 Ω
- 1.2 Frequency: DC-50GHz
- 1.3 VSWR: 1.35:1
- 2 Mechanical&Environmental
- 2.1 Temperature range -45° C ~+125° C
- 2.2 Durability(matings) >500
- 2.3 RoHs Compliant Yes
- 3 Material&Finish
- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Stainless Steel(SU303), Passivated
- 3.3 Insulators: PEI
- 4 Interface Standards
- 4.1 2.4 IEEE STD 287-2007

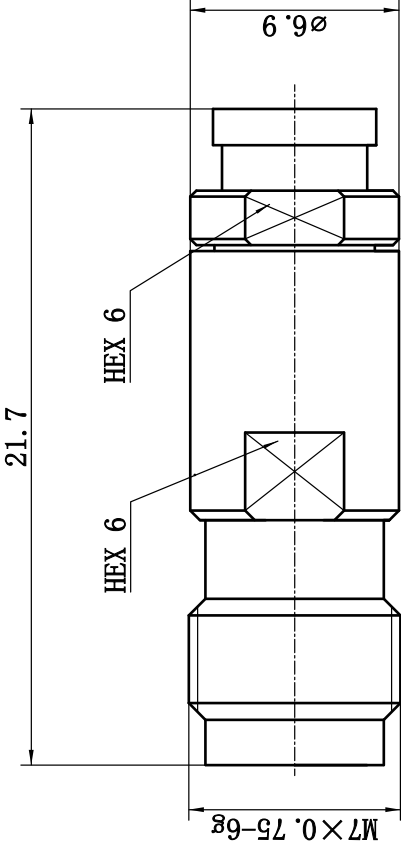

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DATE : T. Shihua 1/8/14		TITLE:	
DESIGNED : C. Tao 1/8/14		RF Coaxial Connector	
DRAWN : W. Qiang 1/8/14		2.4mm Female Connector for Gore CXN3506/TLA220 Cable	
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)	
X	±0.50	A	
.X	±0.20	1/1	
.XX	±0.10	A4	
ANGLES ±1°		N/A	
PART NO. 2.4-K3306G		1/1	
WWW.TEJULIA.COM		A	