

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical 电气性能
- 1.1 Impedance特性阻抗: 50 Ω

1.2 Frequency频率范围: DC~18GHz

1.3 VSWR电压驻波比: ≤1.25

1.4 Insertion Loss(dB): ≤0.05xSqt. (f_GHz)

1.5 Insulation resistance绝缘电阻: ≥5000M Ω


1.6 Dielectric withstanding voltage介质耐压: 750V
- 2 Environmental&Mechanical环境&机械性能
- 2.1 Temperature range温度范围: -55℃~+155℃

2.2 RoHs Compliant 符合RoHs

2.3 Durability寿命: >500 cycles (次)
- 3 Materials&Finish材料&涂镀
- 3.1 Body外壳:Brass, Gold Plated 黄铜, 镀金

3.2 Insulator 绝缘介质:Teflon 聚四氟乙烯

3.3 Contact Pin中心导体:Beryllium-Copper, Gold Plated 铍青铜, 镀金

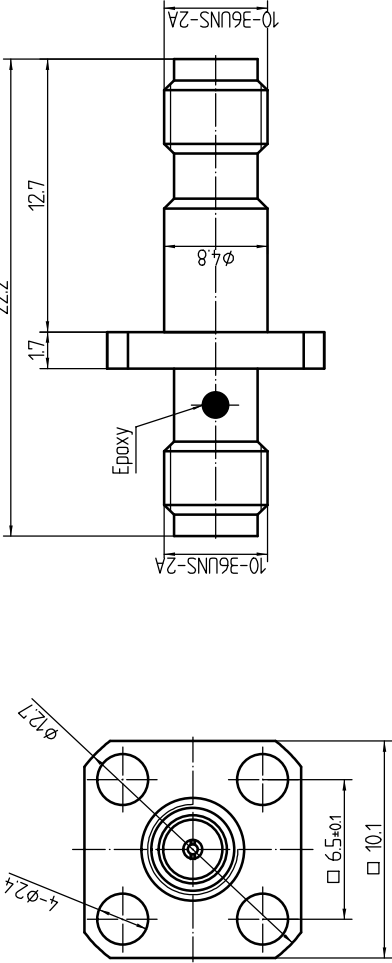

- Notes:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 24/07/15	TITLE:	
ENGINEER: C. Tao 24/07/15	RF Adaptor	
APPROVED: W. Qiang 24/07/15	SSMA Female to Female Flange	
TOLERANCES UNLESS OTHERWISE SPECIFIED	DIMENSION IN MILLIMETERS (mm)	
X ±0.50		
.X ±0.20		
XX ±0.10		
ANGLES ±1°		
PART NO: P. SSMA-KFK	SCALE: A4	REVISION: 1/1
	SIZE: A4	REV: A



www.terulilai.com