



1	2	3	4
This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission			
1 Electrical		2 Mechanical & Environmental	
1.1 Impedance: 50 Ω		2.1 Temperature range -55°C ~ +165°C	
1.2 Frequency: DC-40GHz		2.2 Durability (matings) >500	
1.3 VSWR: 1.25:1		2.3 RoHS Compliant Yes	
1.4 Insertion Loss: 0.3dB max			
3 Material & Finish			
3.1 Pin contact: Beryllium-Copper, gold plated			
3.2 Body: Stainless Steel (SU303), Passivated			
3.3 Insulators: PEI			
4 Interface Standards			
4.1 2.92 MIL-STD-348A			
Notes:			
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME			
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY			
A			
B			

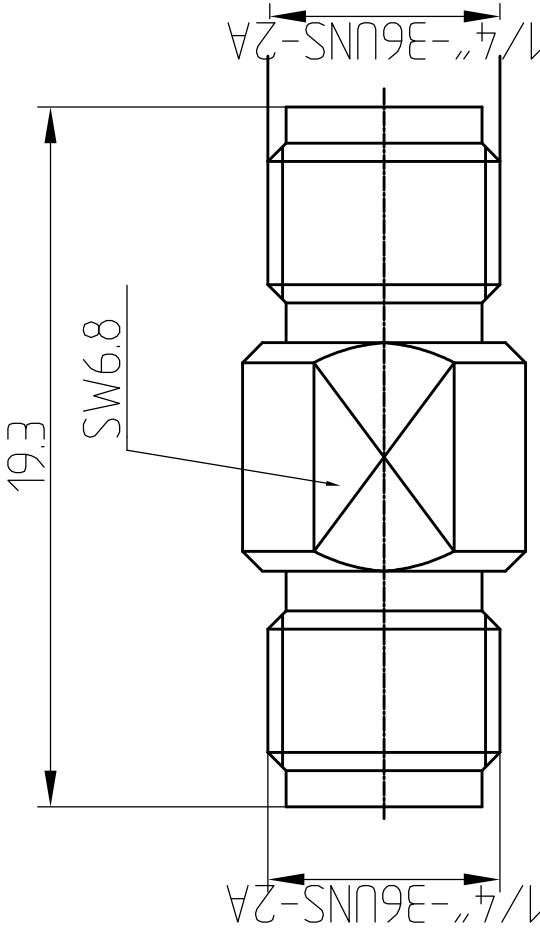

DRAWN: T. Shihua 1/8/14	TITLE:		
ENGINEER: C. Tao 1/8/14	Precision Adapter		
APPROVED: W. Qiang 1/8/14	2.92 Female to 2.92 Female		
TOLERANCES UNLESS OTHERWISE SPECIFIED	DIMENSION IN MILLIMETERS (mm)		
X +0.50	SCHEMATIC		
.X +0.20	SIZE: A4		
.XX +0.10	SCALE: N/A		
ANGLES ±1°	SHEET: 1/1		
PART NO: 2.92-KKG	REV: A		



www.tenulai.com