

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical

- 1.1 Impedance: $50\ \Omega$
- 1.2 Frequency: DC-18GHz
- 1.3 VSWR: 1.20:1

2 Mechanical&Environmental


- 2.1 Temperature range $-55^{\circ}\text{C} \sim +165^{\circ}\text{C}$
- 2.2 Durability(matings) >500
- 2.3 RoHs Compliant Yes

3 Material&Finish

- 3.1 Pin contact: Beryllium-Copper, gold plated
- 3.2 Body: Stainless Steel(SU303), Passivated
- 3.3 Insulators: Teflon

4 Interface Standards

- 4.1 SMA MIL-STD-348A

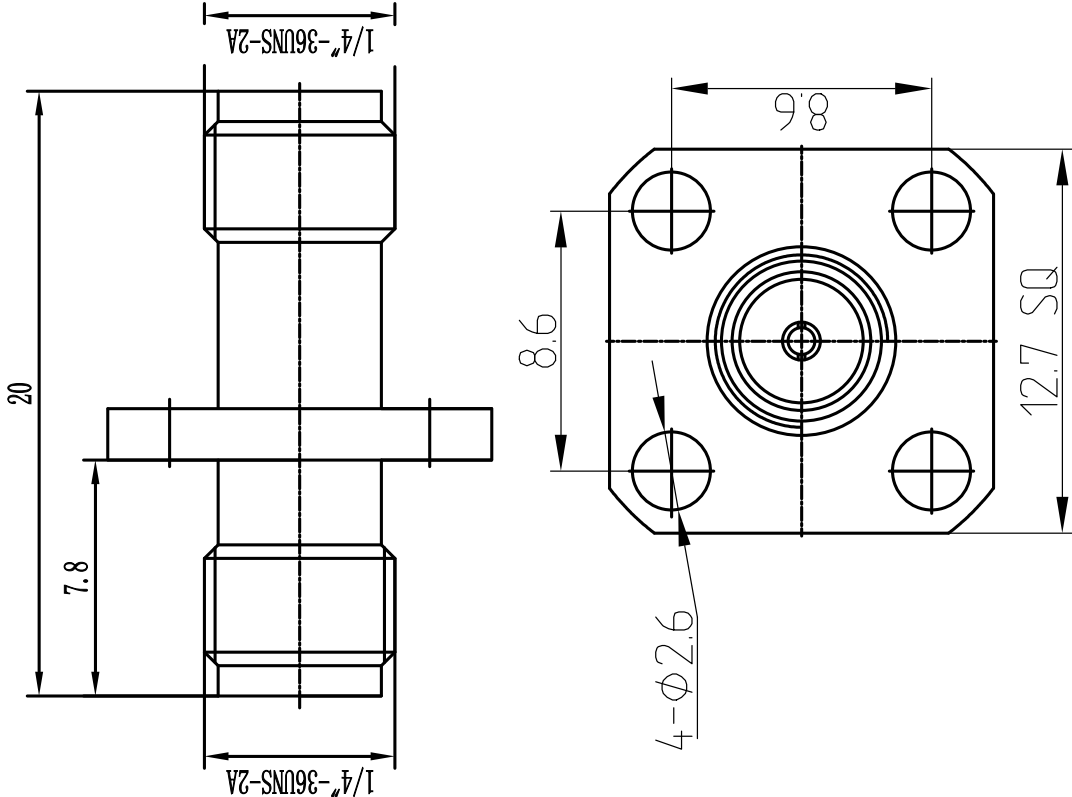

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 26/8/16	TITLE:								www.prlteli.com			
ENGINEER: C. Tao 26/8/16	Precision Adapter											
APPROVED : W. Qiang 26/8/16	SMA Female to SMA Female Flange											
TOLERANCES UNLESS OTHERWISE SPECIFIED									DIMENSION IN MILLIMETERS (mm)			
X ±0.50												
X ±0.20												
XX ±0.10												
ANGLES ±°												
PART NO: SMA-KFKG					SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A				