
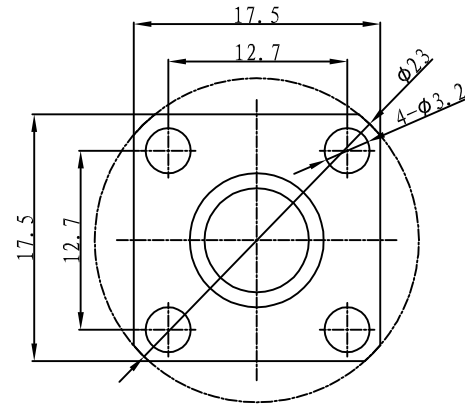


R E V I S I O N		
REV	DESCRIPTION	DATE
△		
△		

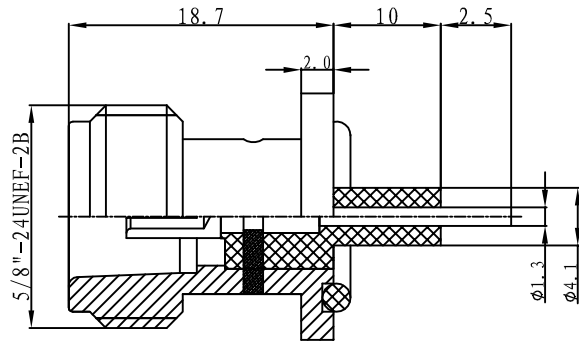

Electrical Characteristics

Impedence	50Ω
Frequency	0-11GHz
Dielectric withstanding voltage	1500V
Center contact resistance	1 MΩ
Outer contact resistance	0.2MΩ
Insulation resistance:	5000 MΩ
Working voltage:	750V(rms)
VSWR	1.30 (MAX)

Material&Plating

Body	Brass, Nickle Plating
Center contact	Phosphor bronze, gold plating
Insulators	PTFE

Environmental Characteristics

Temperature range	-65℃ ~ +165℃
-------------------	--------------

Mechanical Characteristics

Durability	500 cycles
------------	------------

No.	Description	Qty.	Material	Finish	Notes
CUSTOMER	DATE:17-Aug-10	T-rely Electronics Co.,Ltd.			
CUSTOMER CODE	APPROVED Michael Tang	TITLE			
	CHECKED Teresa	N-KFD102			
	DRAWN Jason				
	SCALE 3:1	UNIT mm	WEIGHT —	A4 DWG NO.: TRL101022E	
				SHEET: 1:1	