
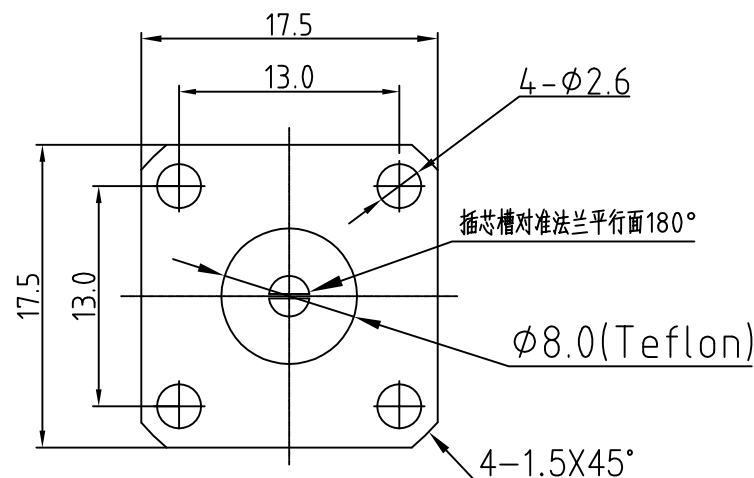


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Shihua	11/09/15	11/09/15
B	New Release	—	T.Shihua		

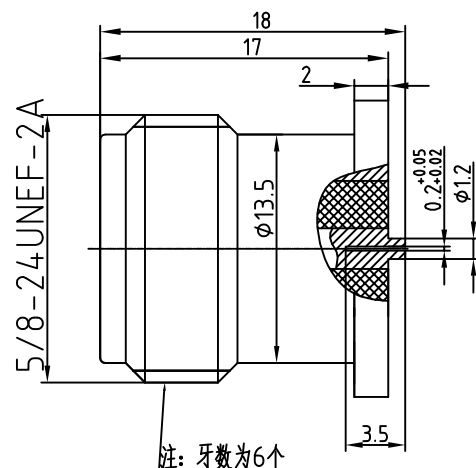

1 Electrical


- 1.1 Impedance: 50Ω
- 1.2 Frequency: 0-6GHz
- 1.3 Insulation resistance: $\geq 5000M\Omega$
- 1.4 Dielectric strength: 1500V
- 1.5 Center Contact resistance $\leq 1M\Omega$
- 1.6 Outer contact resistance $\leq 0.2M\Omega$
- 1.7 VSWR: 1.1 max

2 Materials&Finish

- 2.1 Inner Contact: Phosphor bronze, gold plated
- 2.2 Outer Contact: Brass, Suco-plated
- 2.3 Insulators: PTFE

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 11/09/15	TITLE:	 www.t-rely.com.cn			
ENGINEER: C.Tao 11/09/15	N-KFD111				
APPROVED: W.Qiang 11/09/15	N Female Straight Flange Connector Terminal	 DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED	PART NO: TRL-NF-263868				
X ± 0.50		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: B
.X ± 0.20					
.XX ± 0.10					
ANGLES $\pm 1^\circ$					