

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Technical Data:


- | | |
|------------------------------------|-------------------------------|
| 11 Impedance | 50 Ω |
| 12 Frequency | DC ~3GHz |
| 13 VSWR | ≤ 1.2 |
| 14 Dielectric withstanding voltage | $\geq 1500V$ rms at sea level |
| 15 Insulation resistance: | $\geq 10000M\Omega$ |
| 16 Center contact resistance: | ≤ 0.4 m Ω |
| 17 Outer contact resistance: | $\leq 15m\Omega$ |

2 Environmental & Mechanical

- 2.1 Temperature range
2.2 RoHS Compliant
2.3 Durability

3 Materials & plating

- | | |
|-------------------|----------------------|
| 3.1 Body: | Brass, Nickel plated |
| 3.2 Insulator: | Teflon |
| 3.3 Contact Pin: | Bronze, gold plated |
| 3.4 Coupling Nut: | Brass, Nickel plated |

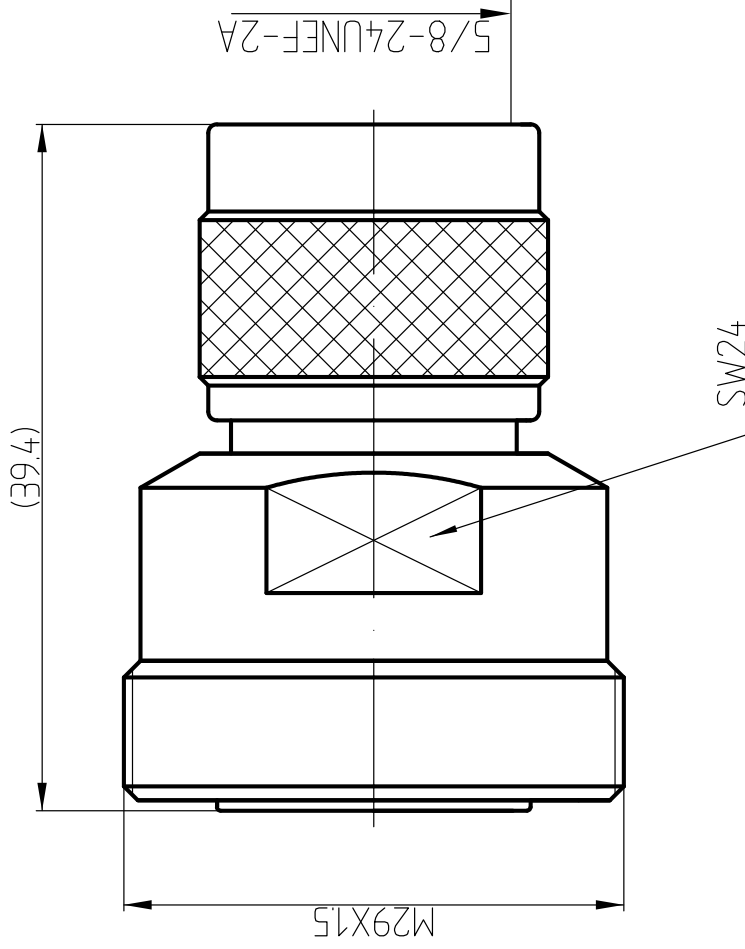

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	16/5/14	16/5/14

DRAWN : T. Shihua 16/5/14 ENGINEER: C. Tao 16/5/14 APPROVED : W. Qiang 16/5/14 TOLERANCES UNLESS OTHERWISE SPECIFIED X +0.50 X +0.20 XX ±0.10 ANGLES ±°	TITLE: RF Adaptor		  DIMENSION IN MILLIMETERS (mm) www.trf-rf.com			
	L29 (7/16.) Female to N Male Adaptor					
	PART NO: L29/N-KJ	SIZE: A4		SCALE: N/A	SHEET: 1/1	REV: A