


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

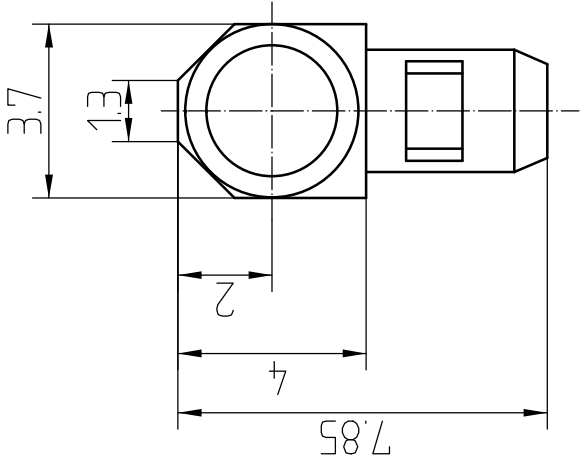


- 1 Electrical
- 1.1 Impedance 50 Ω
 - 1.2 Frequency DC ~6GHz
 - 1.3 VSWR 1.30:1
- 2 Environmental & Mechanical
- 2.1 Temperature range -55 $^{\circ}$ C ~125 $^{\circ}$ C
 - 2.2 RoHS Compliant Yes
 - 2.3 Durability 500 cycles

- 3 Materials & plating
- 3.1 Body: Brass Gold plated <4u'>
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass; Gold plated <4u'>

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	TRL NO.	BY	DATE	APPROVED
A	Initial Release	—	T.HoYun	28/10/16	28/10/16

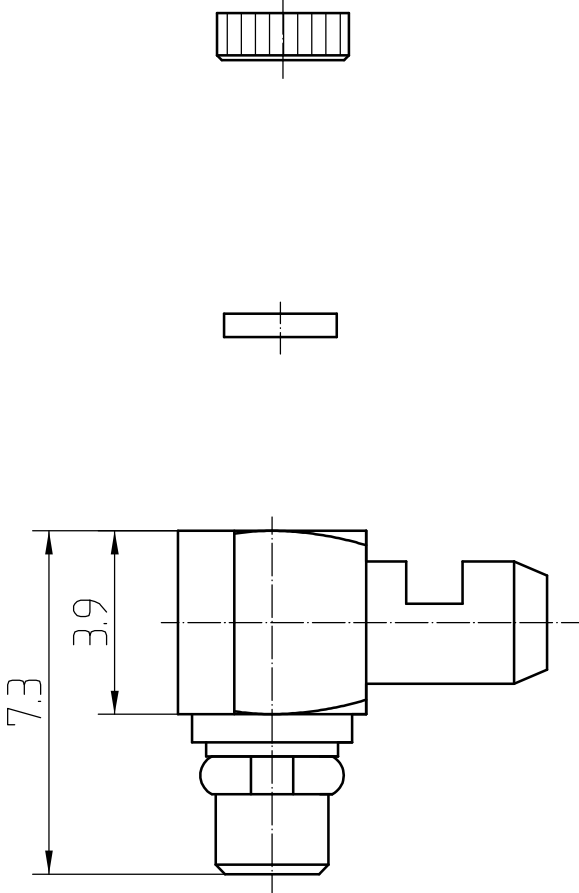

DRAWN: T.HoYun 28/10/16		TITLE: RF Coaxial Connector				www.rf-connector-china.com	
ENGINEER: C.Tao 28/10/16		APPROVED: W.Qiang 28/10/16				DIMENSION IN MILLIMETERS (mm)	
TOLERANCES UNLESS OTHERWISE SPECIFIED		X ±0.50		X ±0.20		XX ±0.10	
ANGLES ±1°		PART NO: MMCX-JMB778		SIZE: A4		SCALE: N/A	
				SHEET: 1/1		REV: A	