


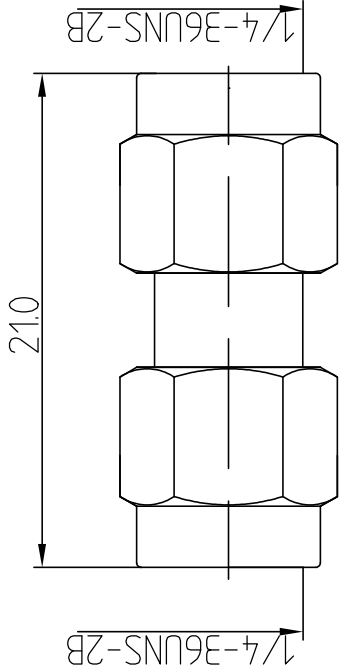

电气指标:

1. 频率范围: DC~6GHz

2. 接触电阻

内导体: $\leq 3\text{ m}\Omega$

外导体: $\leq 2\text{ m}\Omega$

3. 绝缘电阻: $\geq 5000\text{M}\Omega$

4. 介质耐压: 1000V(rms)

5. 使用寿命: 500次

执行标准: GB681 (MIL-C-39012)

材料&镀层

1. 中心接触件: 黄铜, 镀金

2. 外壳: 黄铜, 镀金

3. 绝缘子: PTFE

Electrical Characteristics:

1. Frequency range: DC~6GHz

2. Contact resistance

Center conductor: $\leq 3\text{ m}\Omega$

Out conductor: $\leq 2\text{ m}\Omega$

3. Insulation resistance: $\geq 5000\text{M}\Omega$

4. Insulator withstanding: 1000V(rms)

5. Durability: 500cycles

Application: GB681 (MIL-C-39012)

Material&Finishing

1.Center pin: **Brass, gold plated**

2. Body :brass, **gold plated**

3. Insulators: PTFE

FIRST ANGLE PROJECTION			SCALE
THIRD ANGLE PROJECTION			2:1
		NAME	DATE
DRAWN	Mike Wang		08-01-12
CHECKED	Magi Wang		08-01-12
APPROVED	Teresa Shen		08-01-12

SMA-JJA		UNITS mm	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .20 ± 1° .XX± .10 .XXX±
SMA male to male adaptor			

Xi'an T-rely Electronics Co., Ltd		
-----------------------------------	--	--