



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV		DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release			T.Shihua	10/09/16	10/09/16

- 1 Electrical
- 1.1 Impedence 50Ω
 - 1.2 Frequency DC-6GHz
 - 1.3 Dielectric withstanding voltage 1500V(volts RMS)
 - 1.4 Center contact resistance ≤ 1MΩ
 - 1.5 Outer contact resistance ≤ 0.2MΩ
 - 1.6 Insulation resistance: ≥5000MΩ

- 2 Environmental&Mechanical
- 2.1 Temperature range -55℃~155℃
 - 2.2 RoHs Compliant
 - 2.3 Durability >500 cycles

- 3 Materials&Finish
- 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Bronze, silver plated
 - 3.4 Nut: Brass, Nickel plated
 - 3.5 Gasket: Silicon rubber(red)
 - 3.6 Washer: Brass, nickel plated

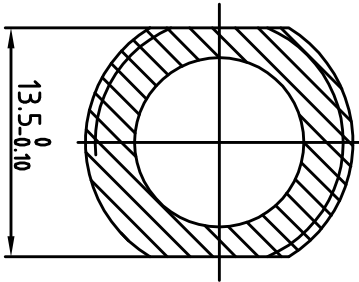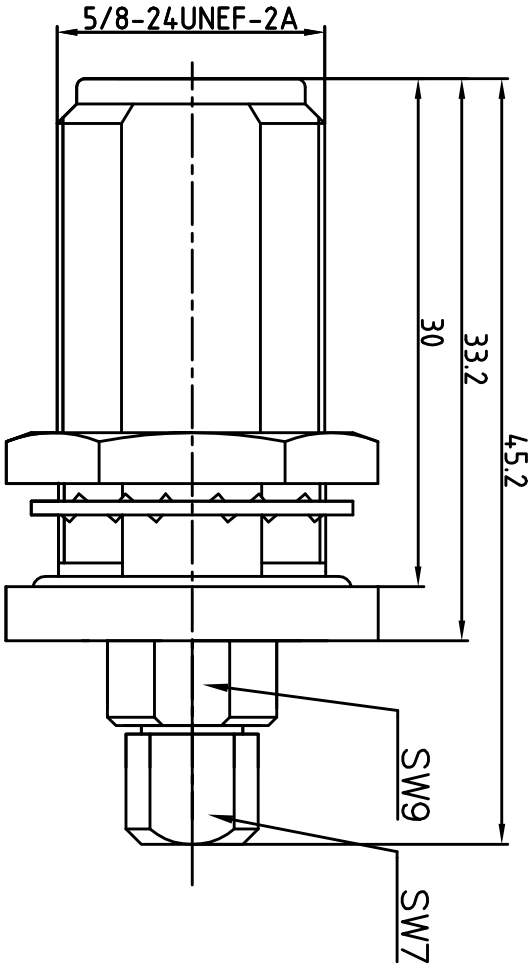

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 10/09/16	TITLE: N-KYB3E		 www.terullal.com	
ENGINEER: C.Too 10/09/16	APPROVED: W.Qiang 10/09/16			
TOLERANCES UNLESS OTHERWISE SPECIFIED		N Female B/H Connector For .141 Cable		
X ±0.50				
XX ±0.20				
XXX ±0.10				
ANGLES 31°				
PART NO: TRL-N2823663	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: B