



This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

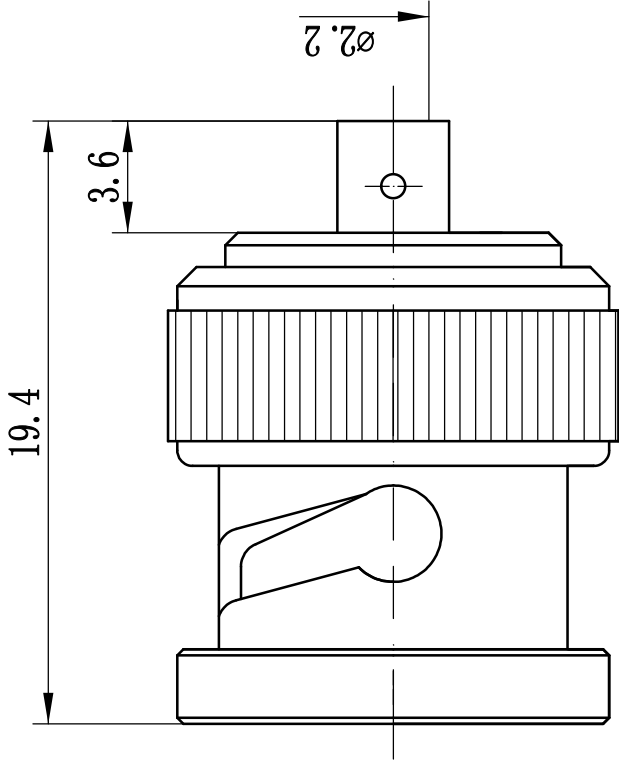

Recommended Cable Stripping Dimension

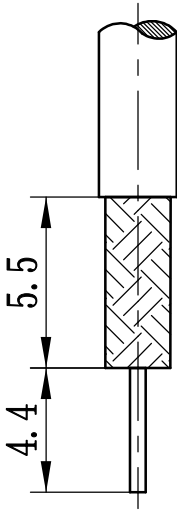

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release		T. Shihua	18/09/13	18/09/13

- 1 Electrical
 - 1.1 Impedence 50 Ω
 - 1.2 Frequency DC-4GHz
 - 1.3 Dielectric withstanding voltage 1000V(volts RMS)
 - 1.4 Center contact resistance $\leq 3\text{M}\Omega$
 - 1.5 Outer contact resistance $\leq 2\text{M}\Omega$
 - 1.6 Insulation resistance: $\geq 5000\text{M}\Omega$
 - 1.7 VSWR $\leq 1.15+0.02\text{F}$
- 2 Environmental&Mechanical
 - 2.1 Temperature range -45 $^{\circ}\text{C}$ ~125 $^{\circ}\text{C}$
 - 2.2 RoHs Compliant
 - 2.3 Durability >500 cycles
- 3 Materials&plating
 - 3.1 Body: Brass, Suco-plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated
 - 3.4 Coupling Nut : Brass, Suco-plated

DRAWN: T.Shihua 18/09/13		TITLE: RF Coaxial Connector		www.rf-connector-china.com		
ENGINEER: C.Tao 18/09/13						
APPROVED: W.Qiang 18/09/13						
TOLERANCES UNLESS OTHERWISE SPECIFIED		BNC Male Conn. for .086/RG405 Cable		DIMENSION IN MILLIMETERS (mm)		
X +0.50						
X +0.20						
XX +0.10						
ANGLES ±1°		PART NO: BNC-JB2	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A