

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

- 1 Electrical

1.1 Impedance

1.2 Frequency

1.3 Dielectric withstanding voltage

1.4 Center contact resistance

1.5 Outer contact resistance

1.6 Insulation resistance:

1.7 VSWR

50 Ω

DC~4GHz

1000V(volts RMS)

$\leq 3M\Omega$

$\leq 2M\Omega$

$\geq 5000M\Omega$

1.20:0
- 2 Environmental&Mechanical

2.1 Temperature range

2.2 RoHS Compliant

2.3 Durability

-45℃~155℃

>500 cycles
- 3 Material&plating

3.1 Body:

3.2 Insulator:


3.3 Contact Pin:

Brass, Nickel plated

Teflon

Phosphor Bronze, Gold plated

- Notes:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
 - CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

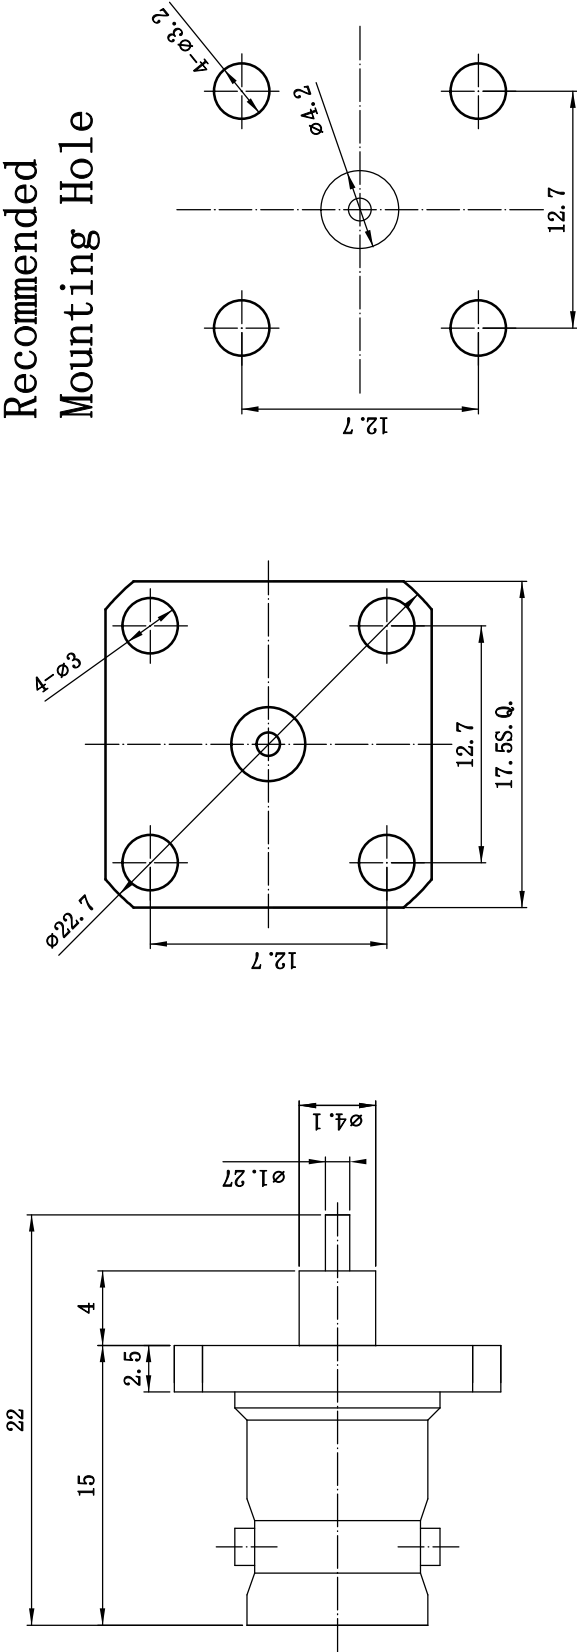

DRAWN: T. Shihua 02/08/13		TITLE:			
ENGINEER: C. Tao 02/08/13		RF Coaxial Connector			
APPROVED: W. Qiang 02/08/13		BNC Female Flange Conn. Terminal			
TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSION IN MILLIMETERS (mm)			
X ±0.50					
.X ±0.20					
.XX ±0.10					
ANGLES ±1°		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
					
		www.rf-connector-china.com			