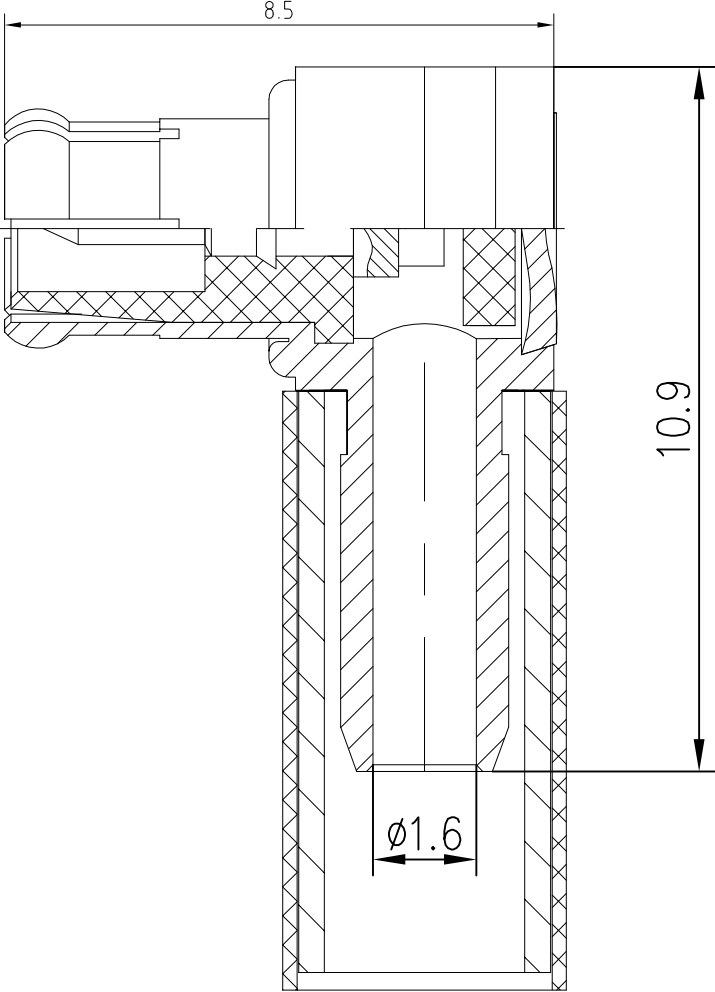



1	2	3	4																	
	TRL120508F																			
A				A																
B				B																
C	Notes: Electrical characteristics 1.Impedance: 50Ω 2.Working voltage: ≤500V 3.Insulation resistance: ≥1000MΩ 4.Dielectric withstanding voltage: 750V 5.Contact resistance Center contact ≤ 5MΩ Outer contact ≤ 2.5MΩ Material&Finish Inner Contact: Brass, gold plated Outer Contact: brass,gold plated Insulators: Teflon			C																
D		<table><tr><td colspan="2">Scale</td></tr><tr><td colspan="2">1:1</td></tr><tr><td>Name</td><td>Date</td></tr><tr><td>Designed Tomson</td><td>24-Oct-10</td></tr><tr><td>Checked Jason</td><td>24-Oct-10</td></tr><tr><td>Approved Teresa</td><td>24-Oct-10</td></tr></table>	Scale		1:1		Name	Date	Designed Tomson	24-Oct-10	Checked Jason	24-Oct-10	Approved Teresa	24-Oct-10	<table><tr><td>MCX-JW3</td><td rowspan="3">UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±</td></tr><tr><td>MCX male right angle</td></tr><tr><td>Connector for RG316 cable</td></tr></table>	MCX-JW3	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±	MCX male right angle	Connector for RG316 cable	D
Scale																				
1:1																				
Name	Date																			
Designed Tomson	24-Oct-10																			
Checked Jason	24-Oct-10																			
Approved Teresa	24-Oct-10																			
MCX-JW3	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±																			
MCX male right angle																				
Connector for RG316 cable																				
Xi'an T-RELY ELECTRONICS CO., LTD.																				