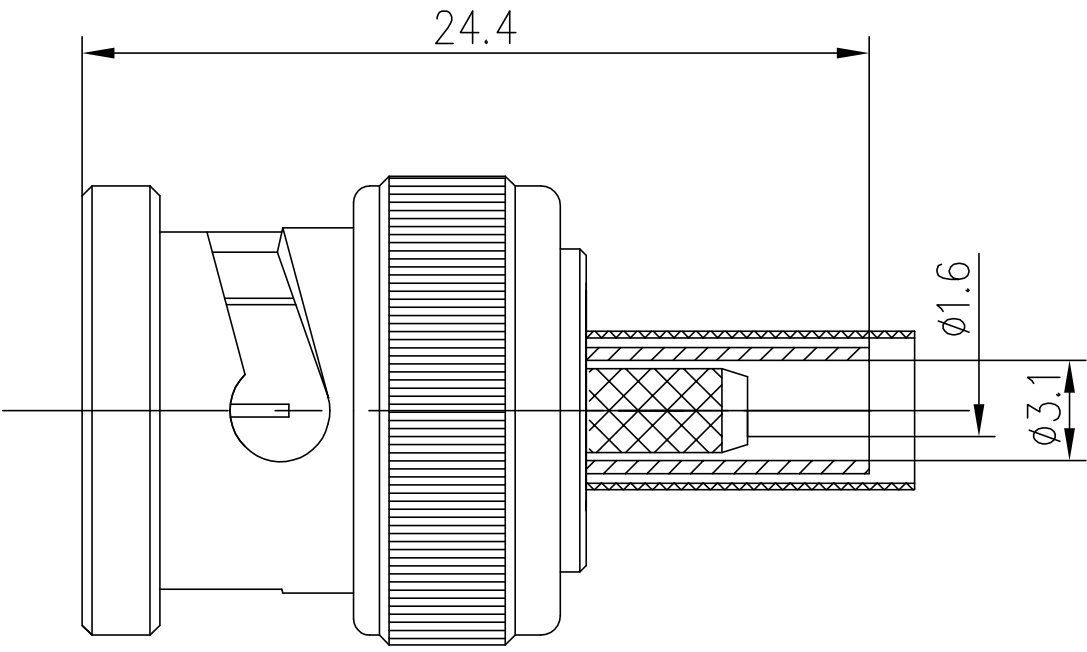



1	2	3	4																
A				A															
B				B															
C	1 Electrical Data: 1.Impedance: 50Ω 2.Working voltage: ≤500V 3.Insulation resistance: ≥5000MΩ 4.Dielectric withstanding voltage: 1500V 5. Center Contact resistance≤ 1.5MΩ 6 Outer Contact resistance≤ 1.0MΩ 2 Material&Finish Inner Contact: gold plated over brass Outer Contact: nickel plated over brass. Insulators: Teflon			C															
D		<table><tr><td colspan="2">Scale</td></tr><tr><td colspan="2">N/A</td></tr><tr><td>Name</td><td>Date</td></tr><tr><td>Designed Tomson</td><td>24-Oct-10</td></tr><tr><td>Checked Jason</td><td>24-Oct-10</td></tr><tr><td>Approved Teresa</td><td>24-Oct-10</td></tr></table>	Scale		N/A		Name	Date	Designed Tomson	24-Oct-10	Checked Jason	24-Oct-10	Approved Teresa	24-Oct-10	<table><tr><td>BNC-J3Y</td><td rowspan="2">UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±</td></tr><tr><td>BNC male Conn. for RG316 cable</td></tr></table>	BNC-J3Y	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±	BNC male Conn. for RG316 cable	D
Scale																			
N/A																			
Name	Date																		
Designed Tomson	24-Oct-10																		
Checked Jason	24-Oct-10																		
Approved Teresa	24-Oct-10																		
BNC-J3Y	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±																		
BNC male Conn. for RG316 cable																			
Danyang Teruilai ELECTRONICS CO., LTD.																			