
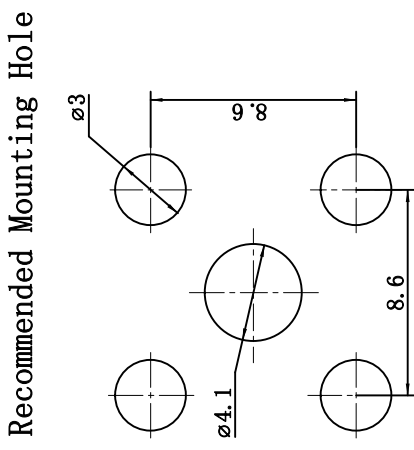
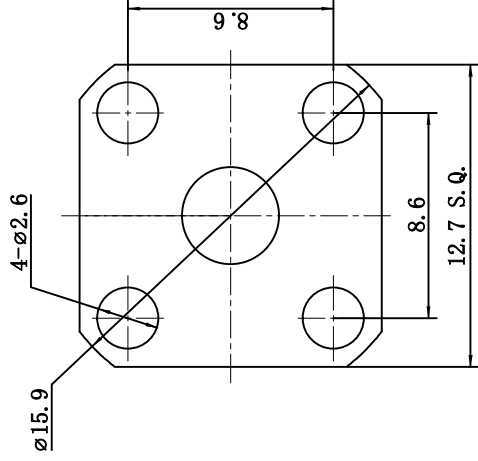


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

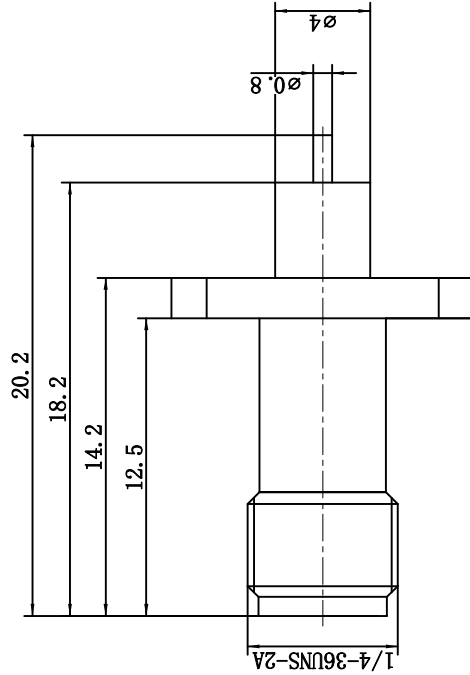

- | | |
|----------------------------|------------------------|
| 1 Electrical | |
| 1.1 Impedance | 50 Ω |
| 1.2 Frequency | DC~6GHz |
| 13 VSWR | 1.15:1 |
| 2 Environmental&Mechanical | |
| 2.1 Temperature range | -55℃~125℃ |
| 2.2 RoHS Compliant | Yes |
| 2.3 Durability | >500 cycles |
| 3 Materials&plating | |
| 3.1 Body: | Brass Tri-Metal plated |
| 3.2 Insulator: | Teflon |
| 3.3 Contact Pin: | Beryllium Copper: Go |

Notes:

- 1.1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 21/12/20	TITLE: RF Coaxial Connector	 www.rf-connector-china.com		
ENGINEER: C. Tao 21/12/20				
APPROVED: W. Qiang 21/12/20				
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°				
PART NO: SMA-KFD1056	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A