
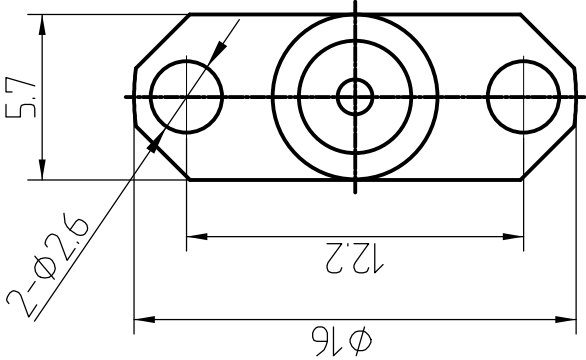


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

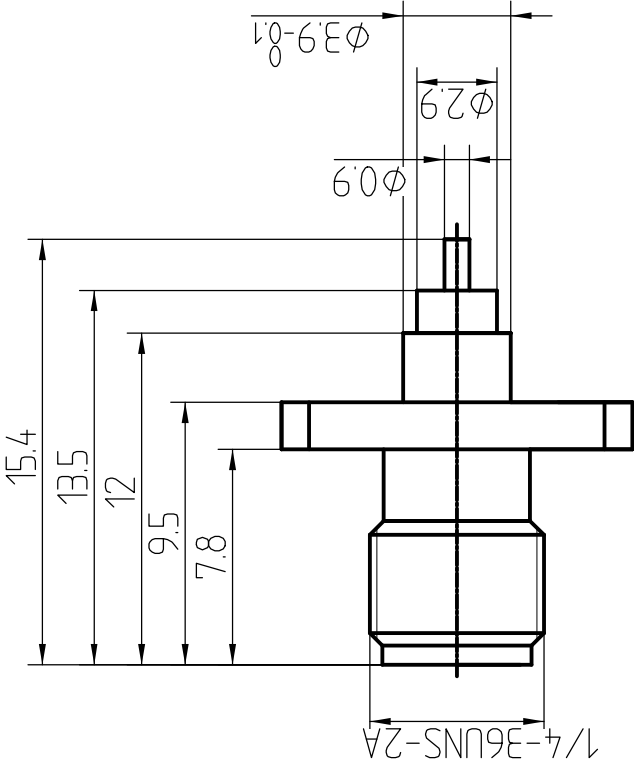

1 电气性能

- 1.1 特性阻抗 50Ω
- 1.2 频率 $DC\sim 6GHz$
- 1.3 介质耐压 $1000V$
- 1.4 中心导体电阻 $\leq 3m\Omega$
- 1.5 外导体电阻 $\leq 2m\Omega$
- 1.6 绝缘电阻 $\geq 5000M\Omega$
- 1.7 VSWR ≤ 1.2

2 材料及涂覆

- 2.1 外壳: 黄铜, 镀金
- 2.2 绝缘子: teflon
- 2.3 内导体: 铍青铜, 镀金

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.HoYun 07/04/16	TITLE: RF Coaxial Connector				www.terulal.com
ENGINEER: C.Tao 07/04/16	SMA Female Flange Connector Mount				
APPROVED: W.Qiang 07/04/16			DIMENSION IN MILLIMETERS (mm)		
TOLERANCES UNLESS OTHERWISE SPECIFIED					
X ± 0.50					
X ± 0.20					
XX ± 0.10					
ANGLES $\neq 45^\circ$					
PART NO: SMA-KFD24B		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A