

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical

1.1 Impedence

1.2 Frequency

1.3 VSWR 1.25:1

2 Environmental & Mechanical

2.1 Temperature range

2.2 RoHS Compliant


2.3 Durability

3 Materials & Plating

3. 1 Body: Brass: Gold plated

3.2 Insulator:

3, 3 Contact Pin: Beryllium-copper, Gold plated

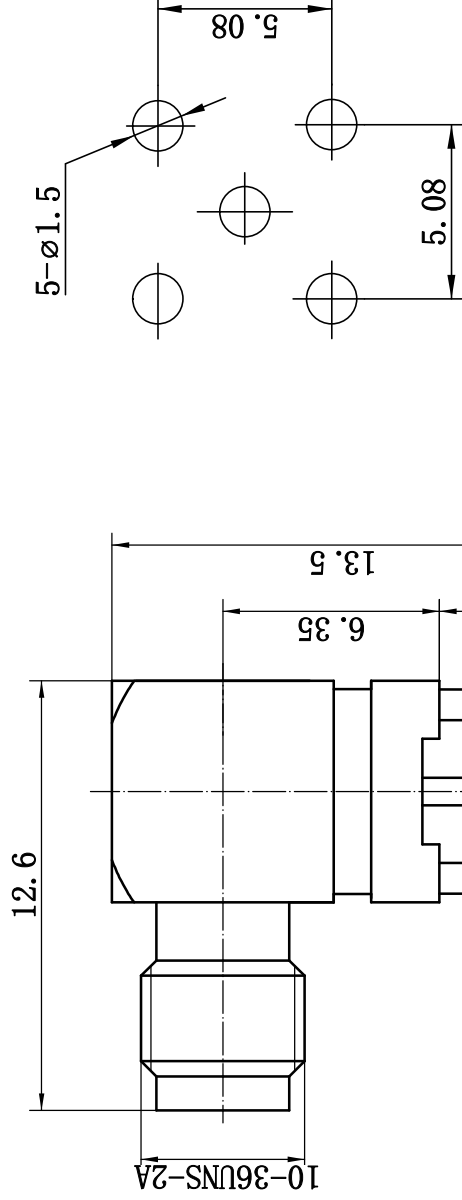

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Haiyun 19/7/16	TITLE: RF Coaxial Connector SSMA Female R/A Conn. PCB Mount	 DIMENSION IN MILLIMETERS (mm)	 www.terulai.com		
ENGINEER: C. Tao 19/7/16					
APPROVED: W. Qiang 19/7/16					
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°					
PART NO: SSMA-KWHD-1		SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A