
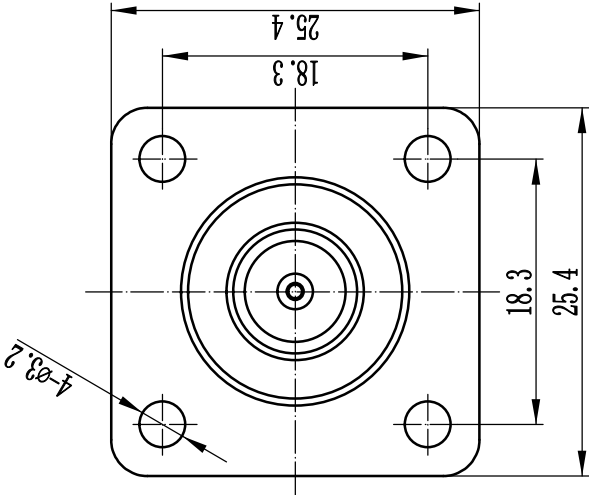


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

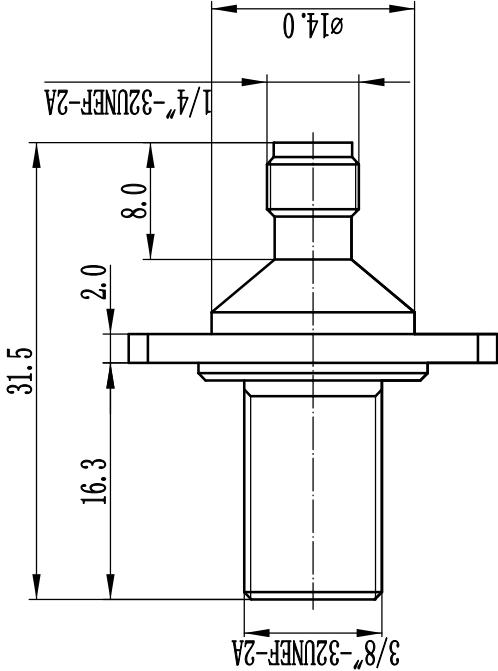

- 1 Electrical
 - 1.1 Impedance 75 Ω
 - 1.2 Frequency DC ~2GHz
 - 1.3 Dielectric withstanding voltage $\geq 750V$ (rms)
 - 1.4 Center contact resistance $\leq 6 m\Omega$
 - 1.5 Outer contact resistance $\leq 1 m\Omega$
 - 1.6 Insulation resistance: $\geq 1000 M\Omega$
- 2 Mechanical and environmental
 - 2.1 Durability 500 cycles
 - 2.2 RoHS Compliant Yes
- 3 Material and plating
 - 3.1 Body: Brass, Nickel plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Brass, Gold plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 18/07/13		TITLE: RF Adaptor		www.rf-connector-china.com	
ENGINEER: C. Tao 18/07/13		F female Bulkhead to SMA female Flange Adaptor		DIMENSION IN MILLIMETERS (mm)	
APPROVED: W. Qiang 18/07/13		TOLERANCES UNLESS OTHERWISE SPECIFIED		X ± 0.50	
				XX ± 0.20	
				XXX ± 0.10	
				ANGLES $\neq 90^\circ$	
PART NO: F/SMA-75K07K		SCALE: N/A		SHEET: 1/1	
				REV: A	