

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

1 Electrical


- 1.1 Impedence 50 Ω
- 1.2 Frequency range: DC-6GHz
- 1.3 VSWR 1.25:1max

2 Environmental&Mechanical

- 2.1 Temperature range -45 $^{\circ}$ C~125 $^{\circ}$ C
- 2.2 RoHs Compliant
- 2.3 Durability 100 mating cycles

3 Materials&plating

- 3.1 Body: Brass, Gold Plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Beryllium-copper, Gold plated

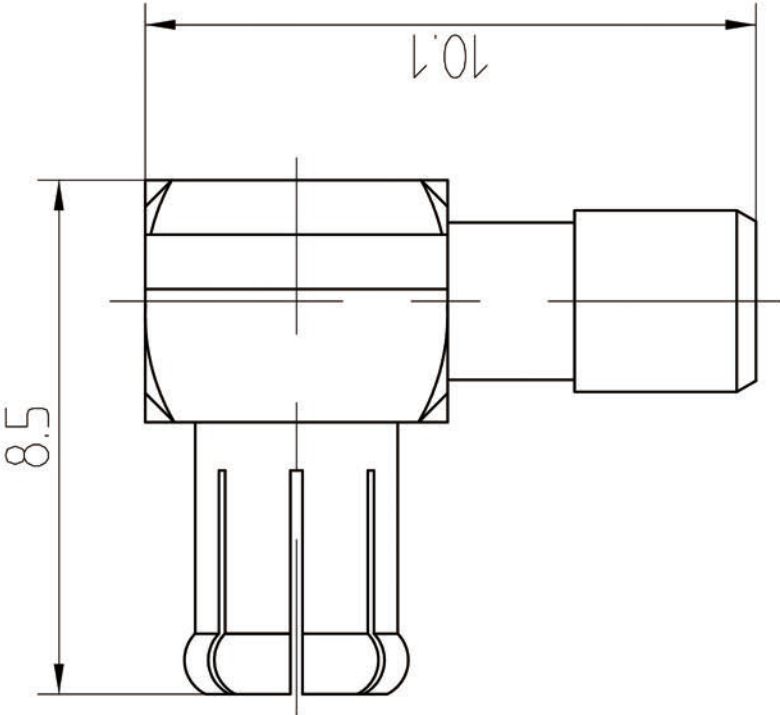

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 2/4/15		TITLE:		RF Coaxial Connector		www.rf-connector-china.com	
ENGINEER: C. Tao 2/4/15		MCX Male Right Angle Conn. For		RG178 Cable			
APPROVED : W. Qiang 2/4/15		TOLERANCES UNLESS OTHERWISE SPECIFIED		X ±0.50			
		X ±0.20		XX ±0.10			
		ANGLES ±1°		PART NO: MCX-JW2		SIZE: A4	
						SCALE: N/A	
						SHEET: 1/1	
						REP: A	
						DIMENSION IN MILLIMETERS (mm)	
							