
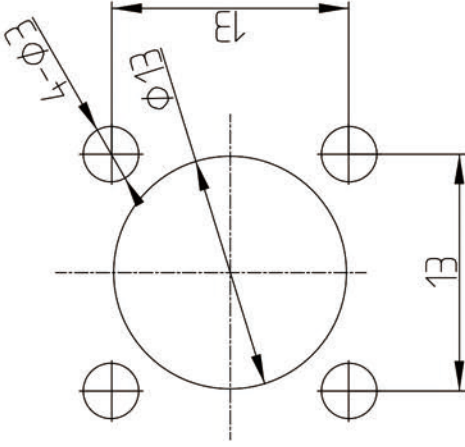
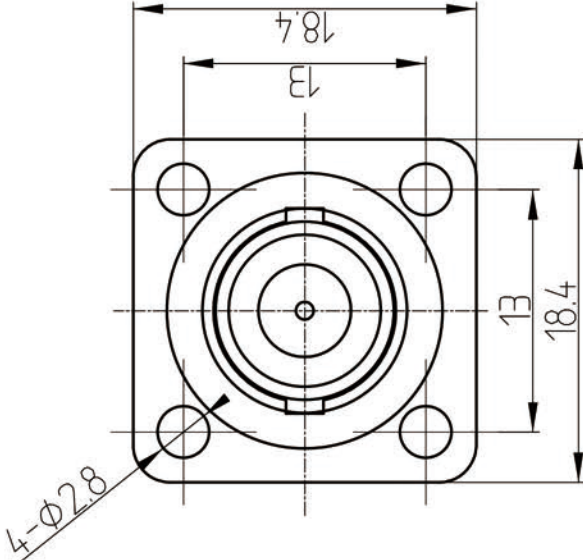


This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

Mounting Hole

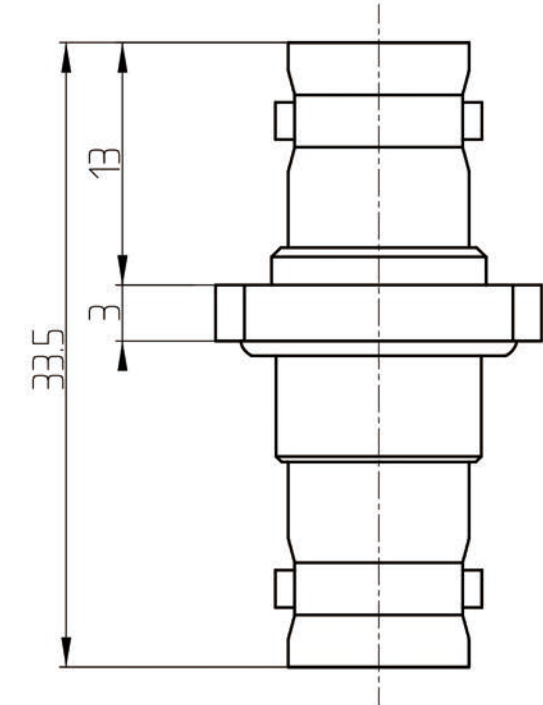

- 1 Electrical
- 1.1 Impedance 75 Ω
 - 1.2 Frequency DC-2GHz
 - 1.3 Dielectric withstanding voltage 1000V(volts RMS)
 - 1.4 Center contact resistance $\leq 3M\Omega$
 - 1.5 Outer contact resistance $\leq 2M\Omega$
 - 1.6 Insulation resistance: $\geq 5000M\Omega$
 - 1.7 VSWR 1.30:1
- 2 Environmental & Mechanical
- 2.1 Temperature range -45 $^{\circ}$ C~125 $^{\circ}$ C
 - 2.2 RoHS Compliant
 - 2.3 Durability >500 cycles

- 3 Materials & Plating
- 3.1 Body: Brass, Nickel Plated
 - 3.2 Insulator: Teflon
 - 3.3 Contact Pin: Bronze, Gold plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	09/07/15	09/07/15

DRAWN: T. Shihua 09/07/15		TITLE: RF Adaptor		www.rf-connector-china.com	
ENGINEER: C. Tao 09/07/15		BNC 750hm Female to Female Flange adaptor		DIMENSION IN MILLIMETERS (mm)	
APPROVED: W. Qiang 09/07/15		TOLERANCES UNLESS OTHERWISE SPECIFIED		SCALE: 1:1	
X ± 0.50		PART NO: BNC-75RFEM		SHEET: 1/1	
XX ± 0.20		ANGLES $\neq 1^{\circ}$		REV: A	
XX ± 0.10					