
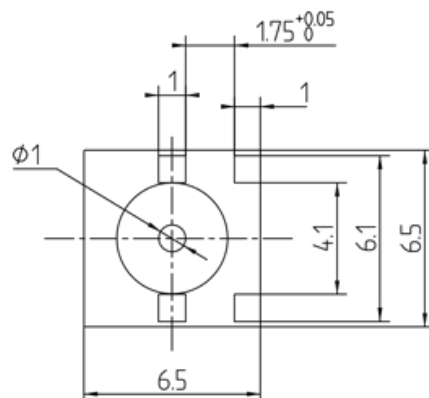


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T. Shihua	01/09/15	01/09/15

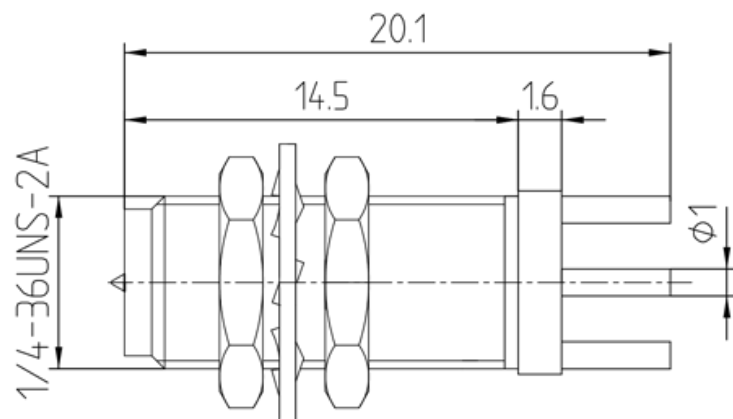

1. Electrical

- 1.1 Impedance: 50ohm
- 1.2 Frequency: DC-6GHz
- 1.3 VSWR: 1.20:1
- 1.4 Insulation resistance: $\geq 5000M\Omega$
- 1.5 Dielectric withstanding voltage: 500V(rms)
- 1.6 Center Contact resistance $< 3M\Omega$
- 1.7 Outer contact $< 2M\Omega$

2 Material&Finish

- 2.1 Inner Contact: Beryllium copper, gold plated
- 2.2 Outer Contact: brass, gold plated
- 2.3 Insulators: PTFE



Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN : T. Shihua 01/09/15 ENGINEER: C. Tao 01/09/15 APPROVED : W. Qiang 01/09/15	TITLE: RF Coaxial Connector RPSMA Female Bulkhead Conn. for PCB	 www.rf-connector-china.com
TOLERANCES UNLESS OTHERWISE SPECIFIED X ± 0.50 XX ± 0.20 ANGLE $\pm 1^\circ$	PART NO: RPSMA-JYHDC6	DIMENSION IN MILLIMETERS (mm) SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A