

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Shihua	10/7/15	10/7/15

1 Electrical


- 1.1 Impedence 50Ω
- 1.2 Frequency 0~11GHz
- 1.3 Dielectric withstanding voltage 1500V(volts RMS)
- 1.4 Center contact resistance ≤1.5MΩ
- 1.5 Outer contact resistance ≤0.2MΩ
- 1.6 Insulation resistance: ≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range -55℃~155℃
- 2.2 RoHs Compliant
- 2.3 Durability >500 cycles

3 Materials&plating

- 3.1 Body: Brass, nickel plated
- 3.2 Insulator: Teflon
- 3.3 Contact Pin: Bronze, Gold plated
- 3.4 Washer: Silicon Rubber
- Coupling Nut: Brass, Nickel plated

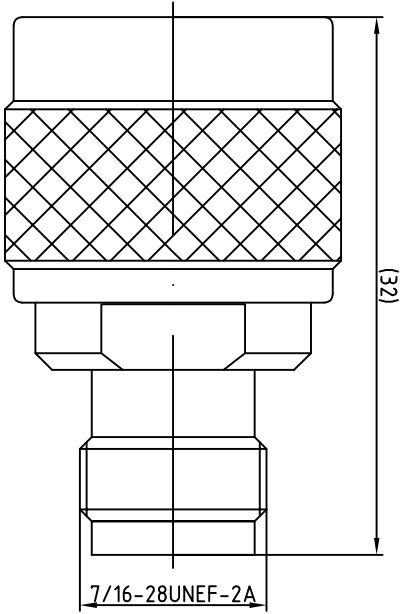

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Shihua 10/7/15	TITLE: N/TNC-JK		STEREN			
ENGINEER: C.Tao 10/7/15	APPROVED: W.Qiang 10/7/15		DIMENSION IN MILLIMETERS (mm)			
TOLERANCES UNLESS OTHERWISE SPECIFIED		SIZE: A4		SCALE: N/A	SHEET: 1/1	REV: A
X ±0.50		PART NO: TRL-Z4Q-328910				
X ±0.20						
XX ±0.10						
ANGLES 45°						