

This document contains proprietary information and such information may not be disclosed to others for any purposes, not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	T.Holyn	16/06/16	16/06/16

1 Electrical


- 1.1 Impedence50Ω
- 1.2 FrequencyDC~11GHz
- 1.3 Dielectric withstanding voltage1500V(volts RMS)
- 1.4 Center contact resistance≤ 1.5MΩ
- 1.5 Outer contact resistance≤ 0.2MΩ
- 1.6 Insulation resistance:≥5000MΩ

2 Environmental&Mechanical

- 2.1 Temperature range-40℃~+70℃
- 2.2 RoHS Compliant
- 2.3 Durability>500 cycles

3 Materials&plating

- 3.1 Body:Brass; Nickel plated
- 3.2 Insulator:Teflon
- 3.3 Contact Pin:Phosphor Bronze, Gold plated

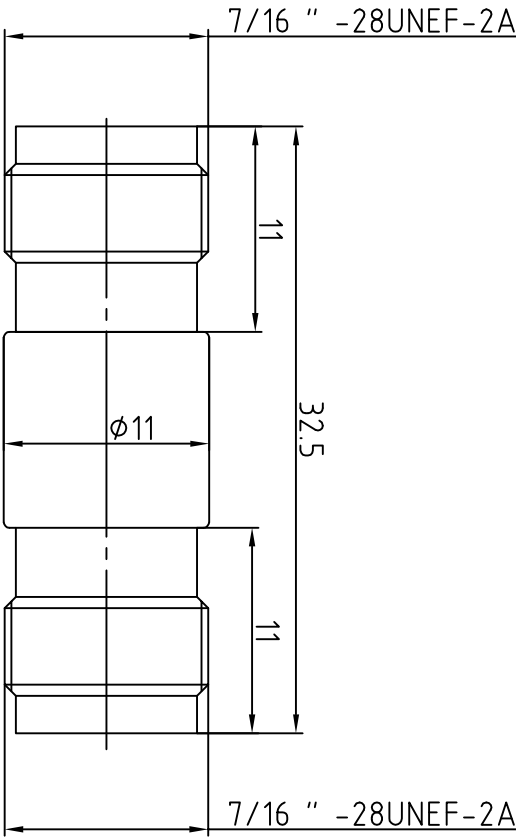

Notes:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T.Holyn 16/06/16		TITLE:	
ENGINEER: C.Too 16/06/16		TNC-KK	
APPROVED: W.Qiang 16/06/16		TNC Female to Female Adaptor	
TOLERANCES UNLESS OTHERWISE SPECIFIED		PART NO: TRL-ZJ0-328908	
X ±0.50		SIZE: A4	
.X ±0.20		SCALE: N/A	
.XX ±0.10		SHEET: 1/1	
ANGLES ±1°		REV: A	

		DIMENSION IN MILLIMETERS (mm)
---	---	-------------------------------

