

- 1

Electrical

50 Ω

DC~4GHz

≤250V

≥1000MΩ

750V

≤ 6m Ω

≤ 1m Ω
- 2

Environmental&Mechanical

-45℃~125℃


500 cycles
- 3

Materials&plating

Brass, gold plating

Brass, gold plated

Teflon

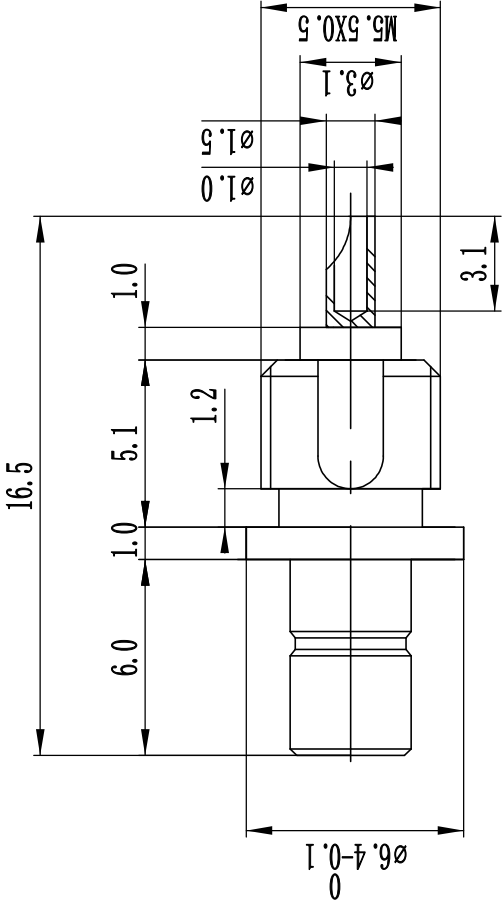

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: T. Shihua 2/12/14	TITLE:		
ENGINEER: C. Tao 2/12/14	RF Coaxial Connector		
APPROVED: W. Qiang 2/12/14	SMB male Bulkhead conn. Terminal		
TOLERANCES UNLESS OTHERWISE SPECIFIED	DIMENSION IN MILLIMETERS (mm)		
X ±0.50	A4		
.X ±0.20	SCALE: N/A		
.XX ±0.10	SHEET: 1/1		
ANGLES ±1°	REV: A		
PART NO: SMB-JYD3	www.tenulal.com		